


Spring Mounting Principle

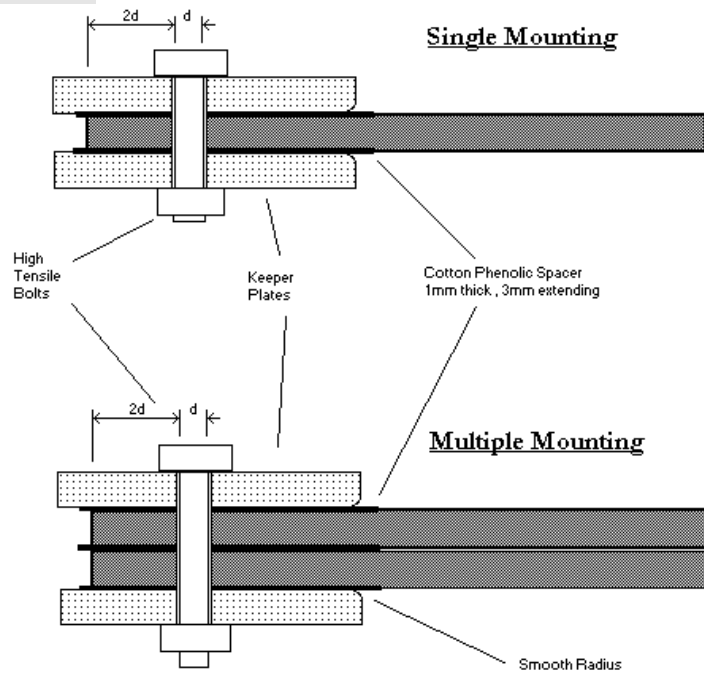

Good quality flat Keeper plates with a clean radius on the flexing edge are very important. If good quality keeper plates are ensured then it is possible to leave out the phenolic spacers which can be a source of dust.

The bolts should be torqued to the maximum permitted and then after running the equipment for a short time the bolts should be re - torqued.